

# Model 620 Nutating Disc Meter

Norstrom nutating disc meters provide precision and durability in a cost-effective design. The 620 meter's exclusive unicast component mounting configuration that assures consistency, particularly in gravity applications.

## APPLICATIONS

- Gasoline
- Kerosene
- Mineral Spirits
- Diesel Fuel

## FEATURES

- Quick reset knob
- Large, easy to read numbers
- Flexible flow ports can be positioned vertically or horizontally
- Gallon or Litre reading
- 3/4" or 1" ports
- Strainer for gravity-flow applications traps tank contaminants
- Teflon® or nickel coatings increase selection of compatible fluids
- BSP threads

## SPECIFICATION



Recommended Flow Range: 5 to 20 GPM (19 to 76 LPM)

Rated Accuracy: ±1%

Maximum Pressure: 50 PSIG

Meter Digit Indication: Up to 99.9 Gallons or 999.9 Litres(Reset)

Totaliser Digit Indication: Up to 99,999.9 Gallons or Litres (Non-Reset)

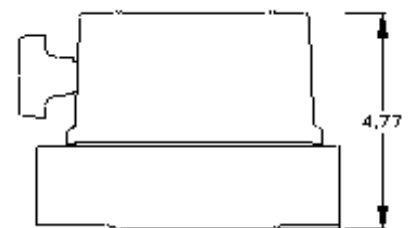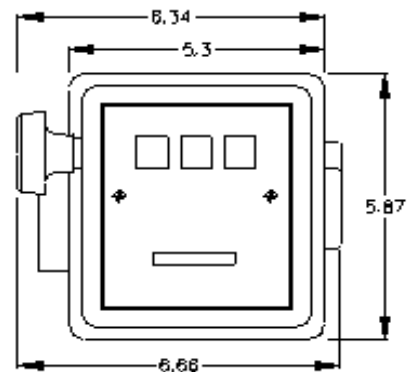

## PRESSURE DROP

This curve represents the expected pressure loss through the **Model 600 Meter** as a function of flow.

Any pump used in the system must supply not only the pressure required to move the fluid, but also to overcome the pressure drop through the meter.

